



adc_createnewrun_body

Table of Contents


adc_createnewrun_body	i
------------------------------	----------

Use this guide to create a new run in ASCENDER DataConnect (ADC) to publish data in the selected Operational Data Store (OSD) instance.

At the beginning of the school year, it is recommended that domains be sent individually in domain dependency order until all applicable domains are publishing successfully.

Create New Run

Access the ASCENDER DataConnect (ADC) tool.

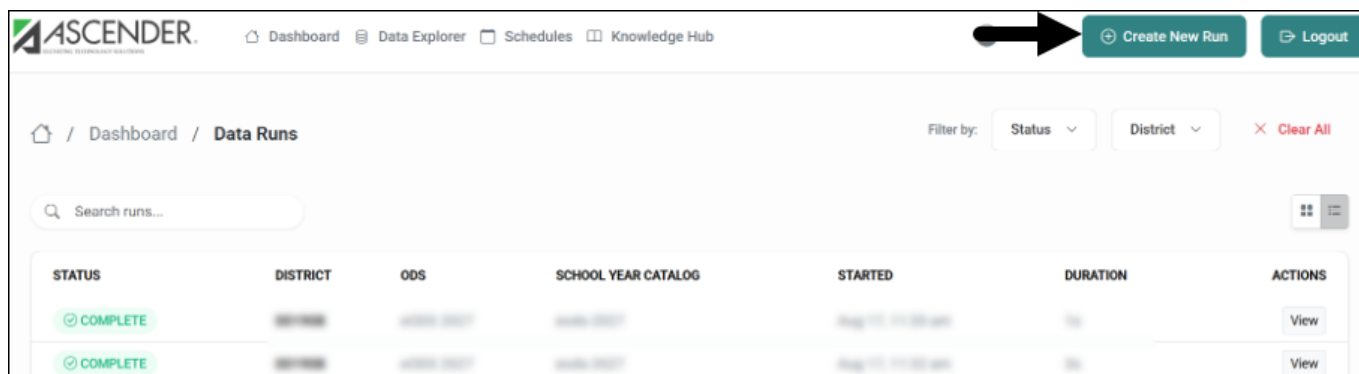

1. From the Dashboard, click **Create New Run**. The Create Run page opens.

☐ Complete the following fields for the New Data Sync Run:

ASCENDER | Dashboard | Data Explorer | Schedules | Knowledge Hub | Admin | Create New Run | Logout

Home / Create Run

New Data Sync Run

District ID: 001908 | School Year: 2027 | School Year Catalog: iods-2027

ODS Instances: ☒ IODS 2027 (School Year: 2027, Catalog: iods-2027)

Description:

Domain Selection

(*) Data Beyond TSDS

☐ Select All Domains (14)

☒ Descriptors Domain Level 0

☒ Education Organization Domain & Descriptors Level 3

☐ Staff Domain Level 3

☐ Student Id Demo Level 3

☐ School Calendar Domain Level 6

☐ Finance Domain Level 7

☐ Student Application Level 7

☐ Discipline Domain Level 9

☐ Supplemental Services Level 9

☐ Teaching And Learning Domain Level 9

☐ Restraint Event Domain Level 15

☐ Student Attendance Domain Level 15

☐ Student Spec Ed Elig Assoc Domain Level 15

☐ Student Academic Record Domain Level 18

Creating 1 run (one per selected ODS instance)

Submit

- In the **District ID** field, click ▼ to select the applicable county-district ID.
- In the **School Year** field, click ▼ to select the applicable school year (2027).
- In the **School Year Catalog** field, click ▼ to select the applicable catalog.
- Under **Domain Selection**:
 - Clear the **Select All Domains** checkbox.
 - Following the domain dependency order, select one domain at a time.

☐ Click **Submit**.

2. Review the Level 1 errors and make any necessary corrections in ASCENDER Enterprise.

3. As Level 1 Errors become manageable, repeat steps 1 and 2, and continue adding domains in dependency order.

4. After all domains are sending successfully, repeat step 1, except now **Under Domain Selection**, mark the **Select All Domains** checkbox to include all domains in the run. Now, you can begin creating scheduled runs.